


Bar Lift Barrier Specification Sheet and Submittal

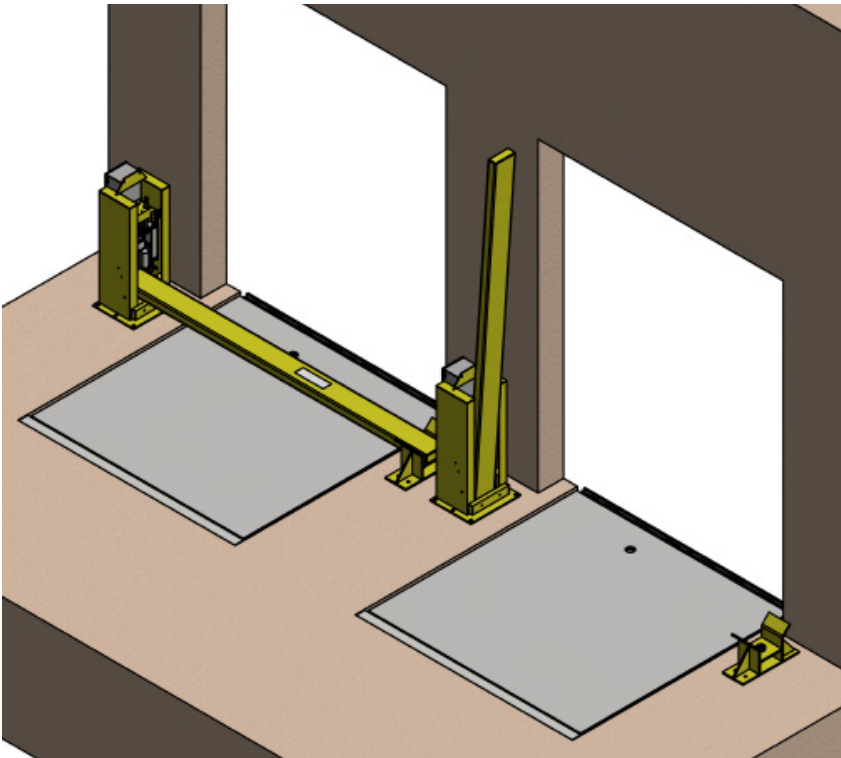

Poweramp's Bar Lift Barrier prevents lift trucks from driving over the dock's edge. Hydraulic operation provides years of trouble-free service. Units can be installed with mechanical, pneumatic, and hydraulic dock levelers or where no levelers are present. The Bar Lift Barrier is rated to withstand impacts from a 10,000 lb load moving at 4 mph. Standard unit (including stanchion, arm and receiver pocket): 12'1" wide. Customized widths available. Gusseted models also available to prevent fork damage to bottom panel of overhead door. Unit ships with anchors needed for installation.

STANDARD FEATURES FOR THE BAR LIFT BARRIER

- Push button activation
- 1 ½ HP self-contained power unit, 115 volt, single phase standard
- Rated to withstand 10,000 lbs of force at 4mph
- Protects overhead door from damage
- Prevents fork lift from falling off loading dock
- Power up and power down control

COMMON OPTIONS

- Interlock with dock leveler
- Three phase electrical
- Fork under-ride protection
- Special paints



Customer: _____ Job: _____ Location: _____ Number of Units: _____ Voltage/Phase: _____ Represented By: _____ SalesRep: _____	Certified For Construction: By: _____ Date: _____ Company: _____ City & State: _____ Drawing #: _____
--	--

SS B2B 05/18

A continuing product improvement process is in effect at Systems, LLC. We reserve the right to make product changes without prior notice.